



Rigging & Sail Handling

Davey Ash Blocks

Inspired by our 1928 range, we have carefully developed these blocks to have the right proportions for the efficient use with ropes from 10mm to 14mm. They are strong, simple and functional but at the same time have the beauty and elegance to enhance the finest of craft.

Key Features

- Bindings: Heavy gauge stainless steel - internal. Fixed and swivel head.
- Sheaves: Tufnol type material as standard, aluminium bronze as an option.
- Bearings: Plain on oversized SS spindles to spread the load and ensure smooth running.
- Shell: High quality ash, formed into a smooth oval shape and varnished.
- Maintenance: By removing just one machine screw the block can easily be disassembled for inspection and maintenance without damaging the wooden shell.
- Appearance: Just beautiful!



Single Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0610/AH/075	3" 75mm	8 - 10	40	1500
0610/AH/088	3 1/2" 88mm	10 - 12	50	1750
0610/AH/100	4" 100mm	12 - 14	60	2000


Single Block & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0611/AH/075	3" 75mm	8 - 10	40	1500
0611/AH/088	3 1/2" 88mm	10 - 12	50	1750
0611/AH/100	4" 100mm	12 - 14	60	2000

Double Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0612/AH/075	3" 75mm	8 - 10	40	1500
0612/AH/088	3 1/2" 88mm	10 - 12	50	1750
0612/AH/100	4" 100mm	12 - 14	60	2200

Double Block & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0613/AH/075	3" 75mm	8 - 10	40	1500
0613/AH/088	3 1/2" 88mm	10 - 12	50	1750
0613/AH/100	4" 100mm	12 - 14	60	2200

Fiddle Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0614/AH/175	7" 175mm	10 - 12	68 & 40	1750
0614/AH/206	8" 206mm	12 - 14	80 & 48	2000

Fiddle Block & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0615/AH/175	7" 175mm	10 - 12	68 & 40	1750
0615/AH/206	8" 206mm	12 - 14	80 & 48	2000

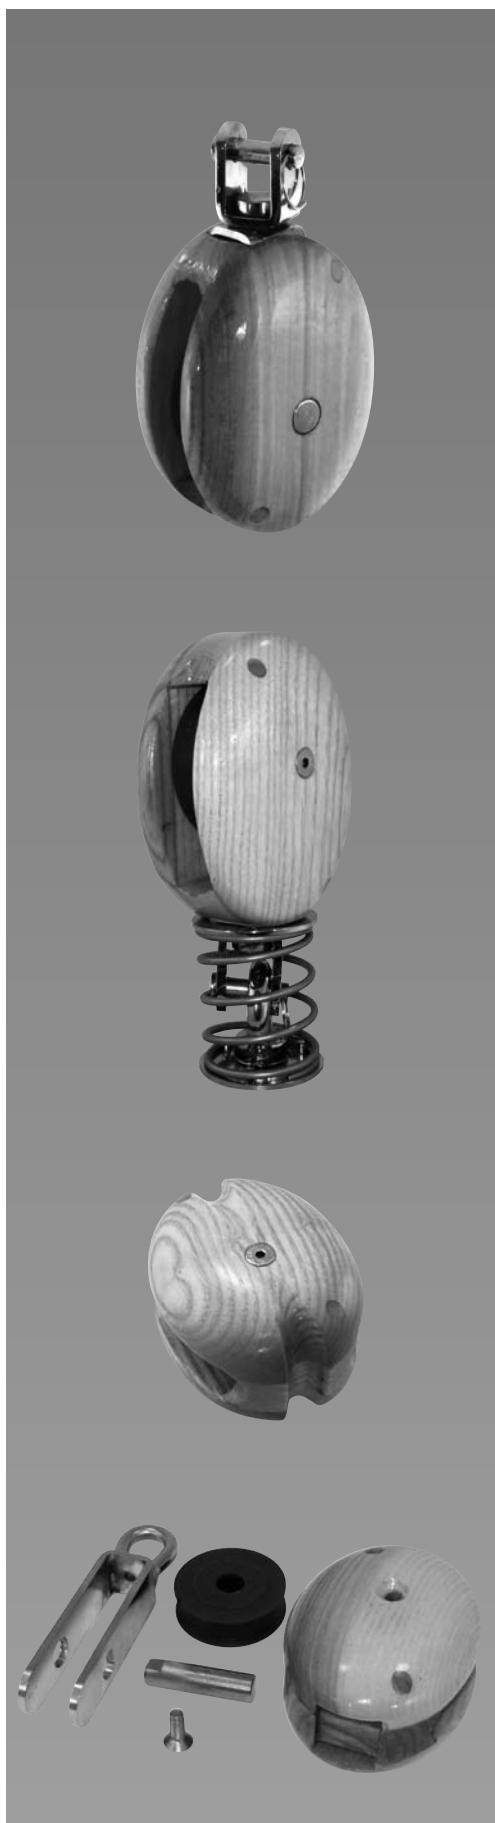

Single Block with Swivel				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0620/AH/075	3" 75mm	8 - 10	40	1500
0620/AH/088	3 1/2" 88mm	10 - 12	50	1750
0620/AH/100	4" 100mm	12 - 14	60	2000

Single Block with Swivel & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0621/AH/075	3" 75mm	8 - 10	40	1500
0621/AH/088	3 1/2" 88mm	10 - 12	50	1750
0621/AH/100	4" 100mm	12 - 14	60	2000

Double Block with Swivel				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0622/AH/075	3" 75mm	8 - 10	40	1750
0622/AH/088	3 1/2" 88mm	10 - 12	50	2000
0622/AH/100	4" 100mm	12 - 14	60	2200

Double Block with Swivel & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0623/AH/075	3" 75mm	8 - 10	40	1750
0623/AH/088	3 1/2" 88mm	10 - 12	50	2000
0623/AH/100	4" 100mm	12 - 14	60	2200

Single Block Stand-up				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0624/AH/075	3" 75mm	8 - 10	40	1500
0624/AH/088	3 1/2" 88mm	10 - 12	50	1750
0624/AH/100	4" 100mm	12 - 14	60	2000

Single Strop Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0617/AH/075	3" 75mm	8 - 10	40	575
0617/AH/088	3 1/2" 88mm	10 - 12	50	635
0617/AH/100	4" 100mm	12 - 14	60	700

Double Strop Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0618/AH/075	3" 75mm	8 - 10	40	635
0618/AH/088	3 1/2" 88mm	10 - 12	50	700
0618/AH/100	4" 100mm	12 - 14	60	800

Size Dia. x Width x Bore	Tufnol Type Sheave	Aluminium Bronze Sheave
40 x 12 x 10	0619/00/040	0619/AB/040
50 x 14 x 12	0619/00/050	0619/AB/050
60 x 16 x 12	0619/00/060	0619/AB/060



Rigging & Sail Handling

Large Ash Blocks

Built to the same high standard, and similar construction method, as our smaller ash blocks but with larger ash shells in relation to the rope size, for use with larger craft. The high strength is derived from the heavy gauge stainless steel bindings and oversized spindles, on which the hard wearing ertalon sheaves run smoothly. The blocks are supplied varnished and suit ropes up to 26mm.



Single Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0650/AH/160	6 ⁵ / ₁₆ " 162mm	16 - 18	90	4600
0650/AH/200	7 ³ / ₄ " 197mm	20 - 22	112	6000
0650/AH/225	8 ³ / ₄ " 224mm	24 - 26	146	6750

Single Block & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0651/AH/160	6 ⁵ / ₁₆ " 162mm	16 - 18	90	4600
0651/AH/200	7 ³ / ₄ " 197mm	20 - 22	112	6000
0651/AH/225	8 ³ / ₄ " 224mm	24 - 26	146	6750



Double Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0652/AH/160	6 ⁵ / ₁₆ " 162mm	16 - 18	90	8850
0652/AH/200	7 ³ / ₄ " 197mm	20 - 22	112	12350
0652/AH/225	8 ³ / ₄ " 224mm	24 - 26	146	13500

Double Block & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0653/AH/160	6 ⁵ / ₁₆ " 162mm	16 - 18	90	8850
0653/AH/200	7 ³ / ₄ " 197mm	20 - 22	112	12350
0653/AH/225	8 ³ / ₄ " 224mm	24 - 26	146	13500



Triple Block				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0654/AH/160	6 ⁵ / ₁₆ " 162mm	16 - 18	90	8250
0654/AH/200	7 ³ / ₄ " 197mm	20 - 22	112	10750
0654/AH/225	8 ³ / ₄ " 224mm	24 - 26	146	13250

Triple Block & Becket				
	Shell Length	Rope Size mm	Sheave size mm	SWL Kg
0655/AH/160	6 ⁵ / ₁₆ " 162mm	16 - 18	90	8250
0655/AH/200	7 ³ / ₄ " 197mm	20 - 22	112	10750
0655/AH/225	8 ³ / ₄ " 224mm	24 - 26	146	13250

Also available to special order Snatch and Swivel Blocks for rope sizes 16-26mm.

